

BAKER

Products



Baker Model 18M™

User Manual

Ellington Industrial Supply, Inc.

P. O. Box 128

Ellington, Missouri 63638 USA

Web site: www.baker-online.com E-mail: info@baker-online.com

Phone: (573) 663 – 7711 Fax: (573) 663 – 2787



TABLE OF CONTENTS

TAB	SECTION AND SUB-SECTION TITLE	PAGE #
1	INTRODUCTION	3
	Machine Purpose	3
	Machine Function	3
	Definition of Terms	4
	Manual Contents Notice	5
	Machine Specifications and Requirements	5
	Warranty	6
	Defective Parts	7
	Service Policy	7
2	RULES FOR SAFE OPERATION	8
	Safety Expectations for Operating Power Equipment	8
	Control of Hazardous Energy – (Lockout / Tagout)	9
	Machine Safety Decals	10
3	INSTALLATION	11
	Receiving and Inspection	11
	Unpacking	11
	Machine Moving	11
	Track and Machine Positioning	11-12
4	SET-UP AND OPERATION	13
	Operator Training	13
	Blade Tensioning	14
	Blade Tracking / Blade Tracking Adjustment	15
	Getting Started	16
	Making the Cut	16-18
5	USE OF LUMBER SCALE	19
	Calibrating Lumber Scale	20
6	SECURING THE MILL FOR TRANSPORT	21
7	MAINTENANCE	22
	General Clean-up	22
	Inspection and Preventative Maintenance	23-26
8	GUIDES	27
	Setting and Adjusting the Guides	27
9	PARTS AND SERVICE	28
	Parts Pictures and Description	28
	Service Contact Information	29
	Serial Number Location	29

INTRODUCTION

Thank you and congratulations on the purchase of your new **Baker Model 18M**. It has been designed to be durable, productive and easy to use. When properly used and maintained, it will provide you with many years of profitable operation.

For safety reasons, and for your own best use of the **Baker Model 18M**, we must insist that you read this manual fully, and constantly review and refer back to it as necessary.

No one should attempt to operate or perform maintenance on this equipment until they have been trained and taken the time to read and understand the information contained in this manual.

Machine Purpose

The **Baker Model 18M** is the economical choice for turning timber into valuable boards and squares.



Machine Function

The **Baker Model 18M** utilizes a 20-hp gasoline engine to turn the 18-inch band wheels that allow you to cut logs up to 30-inches in diameter. Utilizing Baker's exclusive roller style guide system ensures the thin-kerf blade easily pushes through a variety of log species. And making blade height adjustments are easy and simple too.



Definition of Terms

Bark	The outer-most protective layer of a tree composed of dead cork and other elements
Band Saw	A saw consisting of a continuous piece of flexible steel, with teeth on one side
Board Foot or Board Feet	A form of measurement where one board foot equals the volume of a board 1 inch thick by 12 inches wide and 12 inches long (1" x 12" x 12" = 1 board foot)
Cant	The 3 or 4 sided timber left over from a log, normally the center or core of the log
Cant Hook	A device used for rolling cants or logs
Carriage	A framework on wheels that allows movement of the saw back and forth past the log
Edger	A sawmill machine used to remove wany edges from flitches after they come off the sawmill, squaring the edges and ripping the flitch into lumber
Fence (Arm)	A straight guide used to keep a log, cant or board a set distance from a blade or cutter
Flitch	A longitudinal section of a log with wany edges
Saw head or Head Saw	The principle support structures on a sawmill that carries the engine, wheels and band blade used for the initial breakdown of a log
Kerf	The groove or thickness of the path cut by the saw teeth; the total amount of sawdust removed during a single cut
Log Bunk	A cross support that a log is loaded onto
Lumber (board)	A longitudinal section of a log after the wany edges have been removed, normally a 4-sided rectangular shaped piece
Production Rate	A produced or processed quantity measure with respect to another measured quantity of time; for example number of boards per minute, board feet per hour, per day, per week, etc.
Slab	The exterior portion of a log removed by the saw, having one flat and one rounded portion of a log
Thin Kerf	A relative term, typically referencing band saw blades which are usually thinner than circular saw blades thus resulting in greater lumber recovery, accuracy and smooth finish
Wany	Waning or diminished in some parts; not of uniform size throughout; sawed boards or timber that is tapered or uneven, from being cut too near the outside of the log bark
Yield	To generate a return for effort, an amount produced



Manual Contents Notice

This manual is not totally comprehensive. It does not and cannot convey every possible safety and operational problem that may arise while using this machine. The manual will cover many of the basic and specific safety procedures needed in an industrial environment.

All federal and state laws and any regulations having jurisdiction covering the safety requirements for use of this machine take precedence over the statements in this manual. Users of this machine must adhere to such regulations.

Machine Specifications and Requirements

Power: 20-hp gasoline engine with 12-volt battery and electric start

Band Wheels: 18-inch diameter

Band Blade: 13-feet, 5-inches long by 1-1/4 inch wide

Blade Thickness: 0.035-inch

Blade Kerf: 0.080-inch

Guides: Roller blade guide system for higher production, accuracy and extended blade life

Track Length: 16-feet standard; 20-feet optional

Machine Width: 74-inches

Machine Height: 53-inches (with trailer axle removed)

Combined Weight: Standard track length and saw head approximately 800 pounds

Production Rate: Varies according to type of material, thickness of cut, and rate of speed material is cut.



Warranty

Ellington Industrial Supply, Inc. machinery is warranted against defects in material or workmanship starting from the date of shipment from the manufacturing plant.

This warranty is given solely to the “original purchaser” of the equipment and is in no way to be expressed or implied that it is transferable to any other parties without the written consent and approval from the CEO or Sales Manager of Baker Products.

Our one (1) year warranty period covers all items built at our manufacturing facilities including structural frame, cowlings, doors, shafting, dust chutes, trailer axle and guards.

We honor six (6) months of warranty coverage for miscellaneous vendor-purchased-supplied items including bearings, chain, sprockets, hydraulic components, etc.

Ninety (90) days of warranty coverage is provided on all electrical parts. All electrical components and wiring has been installed in accordance with the National Electrical Code (NEC) of the United States of America.

Ellington Industrial Supply, Inc. does not warranty this machine to meet any other requirements or jurisdiction of any electrical or safety codes of any other state, municipality, other country or jurisdiction. The purchaser assumes all risk and liability whatsoever resulting from the use thereof whether used singularly or in conjunction with other machinery or apparatus, including, but not limited to, all matters resulting from sawdust generation.

Note: *No warranty is provided on any electrical components or parts if equipment is powered or connected to a roto-phase electrical converter in order to create a three phase power supply for operational current from a single phase source.*

Any change in materials, design, or performance intended to improve any product of Ellington Industrial Supply, Inc. shall not obligate Ellington Industrial Supply, Inc. to modify any previously manufactured equipment.

This manual may contain details that if not properly followed can affect the performance of your equipment. You are responsible for proper use and maintenance of your equipment and we reserve the right to deny warranty work if deemed to be caused by a lack of proper maintenance or negligence by the owner or any of their employees or other persons allowed to use the equipment.



Defective Parts

Parts claimed defective must be returned freight prepaid, to our plant in Ellington, Missouri. Any part determined defective due to faulty workmanship or materials will be replaced or repaired (at our option) free of charge, F.O.B. our plant. This warranty does not cover expendable items (i.e. drive belts, band wheels, blades, cutters, guides, etc.). Except as expressly provided herein, this warranty is in lieu of all other warranties, expressed or implied, including a warranty of merchantability or fitness for a particular purpose. This warranty is "void" if any part of the unit has been tampered with, modified, altered, or operated with parts other than supplied or recommended by Ellington Industrial Supply, Inc. In no event shall Ellington Industrial Supply, Inc. be liable for special, indirect, incidental or consequential damages, however arising, including but not limited to, the loss of earnings or the cost of downtime.

Service Policy

In the event that you have any problems, call us at (573) 663-7711 any time between 8:00 AM and 5:00 PM (CST), Monday through Friday. A member of our trained staff will answer any questions you may have. We charge nothing for this service.

The only charge is for replacement parts not covered by warranty or after our inspection we deem that the problem is due to operator error or lack of proper maintenance or neglect.

If it is necessary for a member of our service department to visit your plant at your request, there will be a charge for this service. Call our service department for current prices.

Retain this Information for your Records

Model Number:
Serial Number:
Date of Purchase:
Engine Make and Model:

Ellington Industrial Supply, Inc.

P. O. Box 128

Ellington, Missouri 63638 USA

Web site: www.baker-online.com E-mail: info@baker-online.com

Phone: (573) 663 – 7711 Fax: (573) 663 – 2787

RULES FOR SAFE OPERATION

The purpose of safety symbols and signage is to draw your attention to real or possible hazardous conditions that may exist when operating this equipment. Please remember that safety symbols and signage alone do not eliminate danger and are not substitute for proper training and education regarding operational hazards.

	<p>This symbol and warning indicates a potentially hazardous situation, which, if not avoided, <u>will</u> result in death or serious injury.</p>
	<p>This symbol and warning indicates a potentially hazardous situation, which, if not avoided, <u>could</u> result in death or serious injury.</p>
	<p>This symbol and warning indicates a potentially hazardous situation, which, if not avoided, <u>may</u> result in minor or moderate injury.</p>
	<p>This warning provides notice and instruction regarding a potentially hazardous situation, which, if not avoided <u>will</u> result in serious injury or death.</p>

SAFETY EXPECTATIONS FOR OPERATING POWER EQUIPMENT

ALWAYS...

- ENSURE THAT TRAINED PERSONNEL OPERATE, MAINTAIN AND REPAIR THIS EQUIPMENT
- TURN POWER OFF AND LOCKOUT / TAGOUT PRIOR TO PERFORMING MAINTENANCE
- KEEP WORK AREA CLEAN AND WELL LIGHTED TO MINIMIZE OR ELIMINATE HAZARDS
- KEEP CHILDREN AND VISITORS AWAY FROM OPERATING EQUIPMENT
- OPERATE THE EQUIPMENT AT THE RATE IT WAS DESIGNED FOR
- KEEP GUARDS IN PLACE WHEN OPERATING EQUIPMENT
- REMOVE TOOLS BEFORE RESUMING OPERATION
- USE PROPER EXTENSION CORD
- WEAR PROPER APPAREL AND AVOID CLOTHING AND ACCESSORIES THAT COULD GET CAUGHT IN MOVING PARTS
- ALWAYS WEAR SAFETY GLASSES AND HEARING PROTECTION
- AVOID "KICK-BACK" BY KNOWING WHAT CONDITIONS CAN CREATE IT
- CHECK DAMAGED PARTS AND REPAIR OR REPLACE THEM IMMEDIATELY

NEVER...

- LEAVE TOOL RUNNING OR UNATTENDED, ALWAYS TURN POWER OFF
- OPERATE EQUIPMENT WHEN TIRED, FATIGUED OR UNDER THE INFLUENCE OF DRUGS OR ALCOHOL
- ALLOW UNTRAINED PERSONNEL TO OPERATE, MAINTAIN OR REPAIR THIS EQUIPMENT

No list of safety expectations can ever be complete as every work environment is as different as the people operating it.

Always keep safety as your highest priority and always use this machine with caution and respect.

Control of Hazardous Energy – (Lockout / Tagout)

Lockout / Tagout (LOTO) refers to specific practices and procedures to safeguard employees from the unexpected energy, startup of machinery/equipment, or the release of hazardous energy during service or maintenance activities.

This requires that a designated individual turn off and disconnect the machinery/equipment from its energy source(s) before performing service or maintenance and that the authorized employee(s) lock and tag the energy-isolating device(s) to prevent the release of hazardous energy and take steps to verify that the energy has been isolated effectively.

List of Related Terms

Affected Employee	An employee whose job requires them to operate a machine or piece of equipment on which service or maintenance is being performed.
Authorized Employee	A person who locks or implements a tagout system procedure on machines or equipment to perform the service or maintenance on that machine or equipment. An authorized employee and an affected employee may be the same person when the affected employee's duties also include performing service or maintenance.
Energy Source	Any source of electrical, mechanical, hydraulic, pneumatic, chemical, thermal, or other energy.
Lockout	The placement of a lockout device (such as a lock) on an energy-isolating device, in accordance with an established procedure that ensures the device and the equipment cannot be operated until the lockout device is removed.
Servicing and / or Maintenance	Workplace activities such as constructing, installing, setting up, adjusting, inspecting, modifying, and maintaining and/or servicing machines or equipment. These activities include lubrication, cleaning or un-jamming of machines or equipment, and making adjustments or tool changes where the employee may be exposed to the unexpected energy, start-up of equipment or release of hazardous energy.
Tagout	The placement of a tagout device (such as a tag) on an energy-isolating device, in accordance with an established procedure that ensures the device and the equipment may not be operated until the tagout device is removed.

Example of lockout tags, lockout hasp and keyed lock



The Fatal Five Main Causes of Lockout/Tagout Injuries

1. **Failure to stop equipment**
2. **Failure to disconnect from a power source**
3. **Failure to dissipate (bleed, neutralize) residual energy**
4. **Accidental re-starting of equipment**
5. **Failure to clear work areas before re-starting**

Machine Safety Decals ** Adhere to ALL Safety Warnings! **

Safety First

- ☞ Always allow all moving parts to stop completely before changing blade or servicing machine.
- ☞ Never operate machine without guards and doors in place.
- ☞ Always wear eye and ear protection when operating machine.
- ☞ Never wear loose clothing when operating this machine.
- ☞ Always keep fingers and hands away from blade while operating machine.

CAUTION
HOT

**Do Not Operate
Without Guards**

BAKER
Products

INSTALLATION

Receiving and Inspection

- Upon receipt and prior to signing carrier's documents, conduct a walk-around and visual inspection of your new equipment. **Note any damage in writing upon the carrier's bill of lading and contact Baker Products immediately. Failure to do so could reverse damage charges back to receiving party.**


Note: All new equipment is assembled and thoroughly tested prior to shipment, however damage may occur during transit, which could cause the machine to not operate correctly during start-up.

Unpacking

- If machine was delivered via flatbed trailer, remove straps or chains securing it in place.
- If machine was delivered by crate, carefully remove upper crating materials from the base skid.
- Remove lag screws, strapping, etc. that attaches the machine to the skid.

Machine Moving

- If required, lift machine at the indicated lift points only.
 - o Use a safety strap to avoid tip-over.
- Otherwise use the trailer / tow hitch provided.
- Transport machine to the operation site.

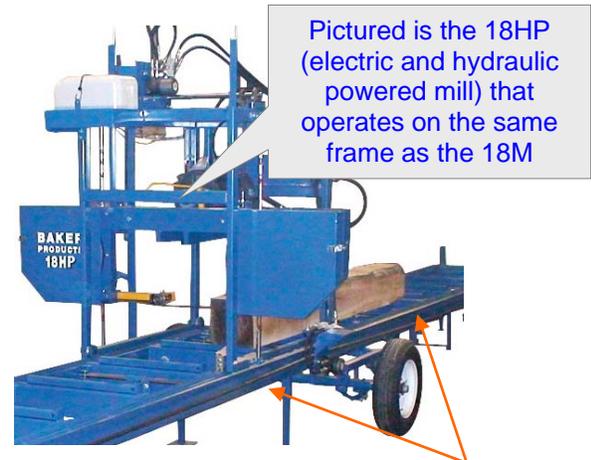

Lift points – center the saw head over the axle and equally space forks under the carriage frame for a balanced lift

Track and Machine Positioning (*Placement, Leveling, Alignment*)

- For best performance, choose a solid, level foundation that is free of environmental elements such as rain or snow that could cause mechanical or slip hazards. A level cement pad works best, but square timbers also work well under the leveling legs.
- We recommend an open or well-ventilated area that will exhaust engine emissions.
- Provide a minimum of 4 feet of clear workspace around the entire perimeter of the track.
- Remove trailer axle and store in a dry location.
- Assemble the track so that the log clamps are on the same side of the mill that the operator will work from.
- Bolt the sections of track together with the nuts and bolts provided, ensuring the track is flush where the ends are bolted together.
- Level the track front to back and side to side. For optimal results, the Model 18M must be level and free of crowns or dips for the length of the adjoined tracks. Consider the use of a string line to check for straightness along the track length.
- Raise the head a minimum of 3 inches and roll from end to end to verify the track is aligned properly for smooth operation. Adjust or re-level as necessary.

Track and Machine Positioning *(continued)*

To remove the detachable section of track, loosen the leveling legs (2 per side) and set it aside while you remove the trailer axle



Figure 12A

After the trailer axle has been removed and the frame is positioned on a solid work surface, place the detachable section of track over the trailer hitch and align the holes and tighten via the bolts and nuts provided





SET-UP AND OPERATION

Operator Training

According to many OSHA, ANSI, STATE, and LOCAL CODES, it is the EMPLOYER'S RESPONSIBILITY to:

- Permit only trained and authorized employees to operate and maintain equipment.
- Inspect and maintain guards, safety devices and start/stop controls.
- Instruct, train and supervise the safe method of work.

Be sure personnel are properly trained and safety rules are clearly understood before operating or performing maintenance.

- ✓ **Operator**
- ✓ **Machine**
- ✓ **Guards**
- ✓ **Devices**
- ✓ **Instructions**

*All of these together make up the safety system.
Failure of any one of these factors will increase
accident potential.*

Note: *Prior to start-up and then again after two weeks, check that all nuts and bolts are tight. Then follow the instruction and schedule outlined in the Inspection and Preventative Maintenance section.*

**FREE TRAINING ON PROPER SET-UP AND
OPERATION IS AVAILABLE ON SITE AT
THE MANUFACTURER'S FACILITY**

Blade Tensioning

- ❑ Your mill is shipped to you with minimal blade tension to help avoid the development of flat spots that could cause the blade to track improperly on the band wheels.

⚠ DANGER *Note: For the Honda 20-hp engine this requires the key to be removed from the ignition and a “do not operate” tag attached to the engine.*

- ❑ Open and remove the two (2) cowling doors.
- ❑ Verify that the back of the blade is flush with the back of each band wheel (**Figure 14**).
- ❑ To tension the blade, turn the t-handled all-thread bolt clockwise until the factory set tension marks align (**Figure 14A, 14C**).
- ❑ Carefully rotate the band wheel counter clockwise to ensure blade tracks properly.
 - See next section (**Blade Tracking**) if an adjustment is necessary.
- ❑ Once proper tension and tracking is achieved, return and secure the cowling doors.
- ❑ If necessary, refer to **Setting and Adjusting the Roller Guides**, page 25.

Back of band blade should be flush with back of band wheels



Figure 14

De-tensioned blade, marks not aligned

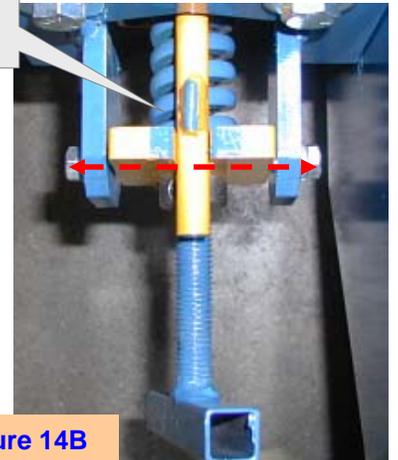


Figure 14B

Blade tension adjusting t-handle

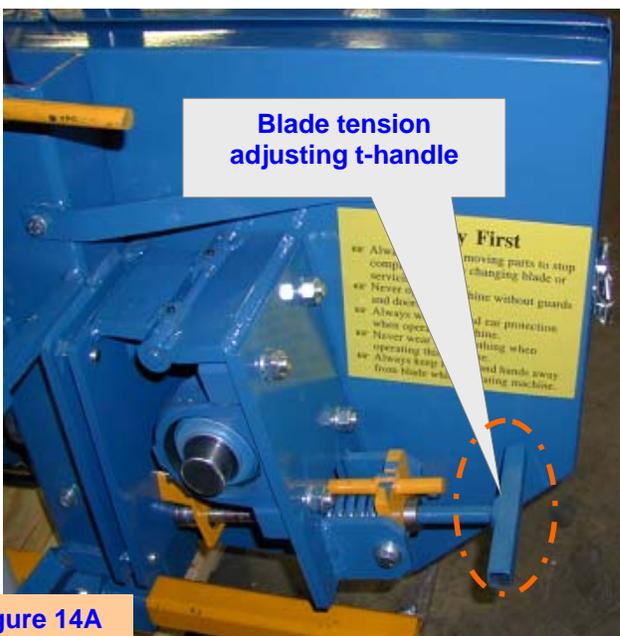


Figure 14A

Pre-set factory blade tension mark

Marking aligned = proper tension

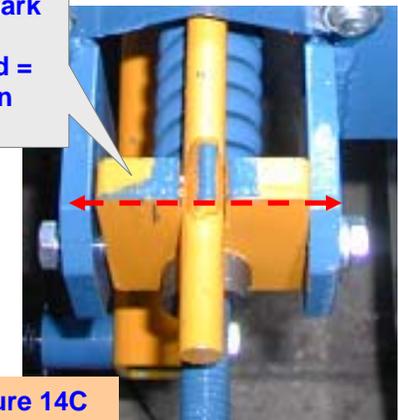


Figure 14C

Blade Tracking

- ❑ The blade tracking is set at the factory prior to shipment, but it may periodically have to be adjusted or reset. Most band blades will vary on how they track due to blade material.





Note: For the Honda 20-hp engine this requires the key to be removed from the ignition and a “do not operate” tag attached to the engine.

Blade Tracking Adjustment

Note: If the blade is tracking out just a little after running for a few minutes, don't be alarmed; most blades do this as they self-adjust to the contour of the wheels.

- ❑ Open and remove the two (2) cowling doors.
- ❑ If the blade is running out or in more than 1/32” you should try three or more blades or another box of blades before making any tracking adjustments. This will help you determine whether it's the blade(s) or something else that is affecting tracking.
- ❑ If the blade is **tracking outward** and you want to move blade tracking “inward”, adjust the top and bottom band wheel tracking bolts by loosening the center jamb nut and then tighten the bolts via the bolt head one (1) revolution to the right (**Figure 15 and 15A**).
- ❑ Next make the same adjustments on the opposite wheel by loosening the center jamb nut and then tighten the bolts via the bolt head one (1) revolution to the right.
- ❑ After tracking bolts have been adjusted, rotate the idler wheel several rotations counter-clockwise and look at the blade gullet in relation to the front face of the wheel to ensure tracking is consistent. Continue to adjust and fine tune as necessary.
- ❑ If the blade is **tracking inward** and you want to move blade tracking “outward”, loosen the center jamb nut and then loosen the tracking adjustment bolts one (1) revolution via the bolt head. Repeat the same steps for the opposite side wheel.
- ❑ Once proper blade tracking has been achieved, re-tighten the jamb nuts (2 per side) for both the pull and idler wheel.
- ❑ Return and fasten the cowling doors.

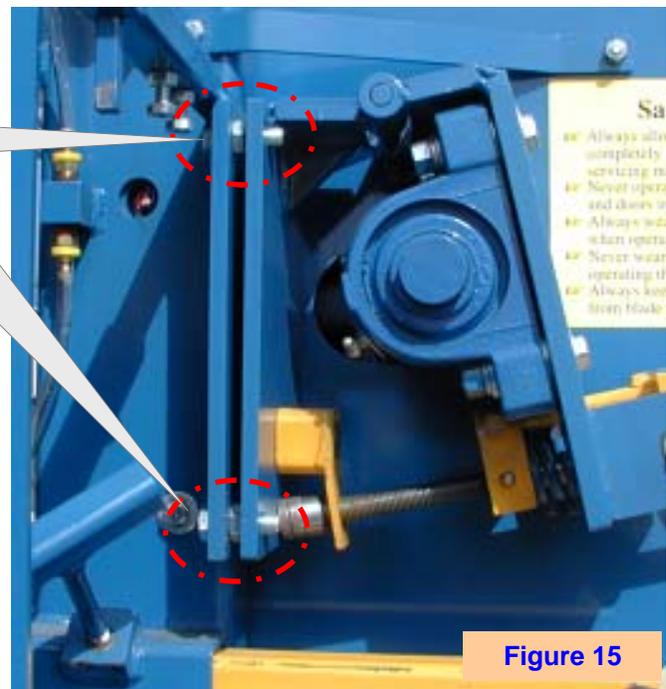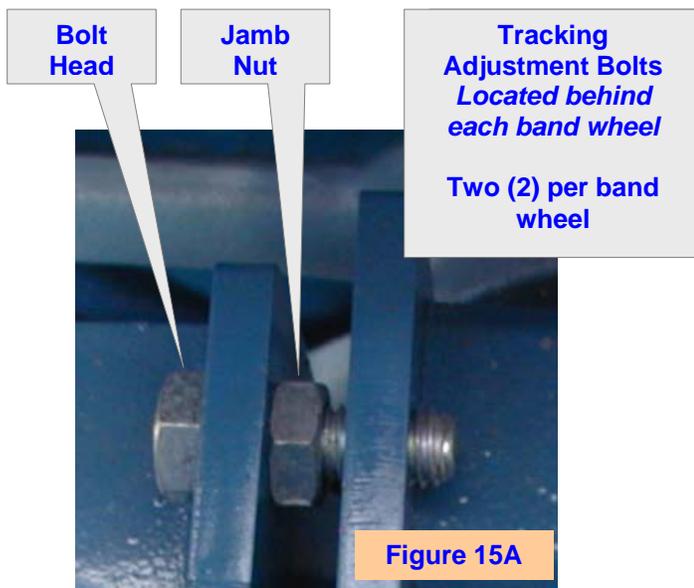

Getting Started

Log loading options for this mill include the use of two 4" x 4" or 4" x 6" timbers or the use of a forklift or front-end loader. After loading a log onto the track, roll it against the raised fence arms and secure it into position with the log clamp by turning the handle clockwise and screwing the clamp into the log.

⚠ DANGER **Note: Ensure top of fence arms and log clamp are positioned safely below the height of the blade. Failure to do so will result in blade damage.**



Figure 16



Figure 16A

Raised fence
arms

Making the Cut

To START Processing

Step 1: Prior to starting the engine, complete a visual inspection to ensure all guards and covers are in place and secure.

Step 2: Loosen the t-handle securing the moveable guide and slide it in or out until it is slightly (*no more than 2 inches*) wider than the maximum width of the log. Tighten the t-handle after proper adjustment has been made (**Figure 15B & 15C**).

Note: As you cut slabs and boards or squares from your log, you will want to bring your guides in closer to ensure the best performance and quality cuts.

Backside view of t-handle
securing moveable guide

Guides properly
positioned for quality cut

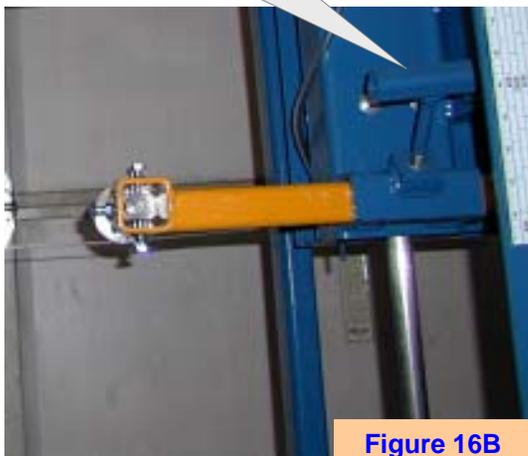


Figure 16B


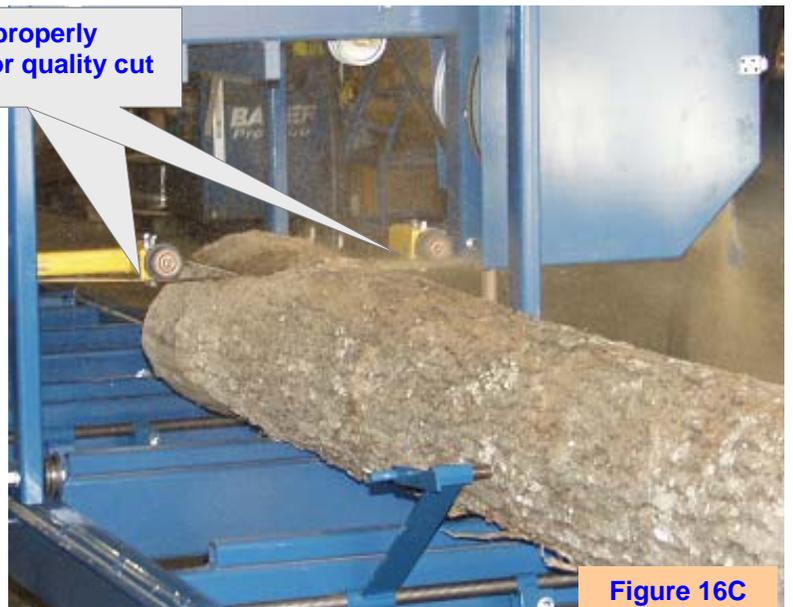


Figure 16C

Making the Cut *(continued)*

Step 3: Start the engine and let it idle and warm up for at least 2 minutes. Maximize engine throttle when ready to cut.

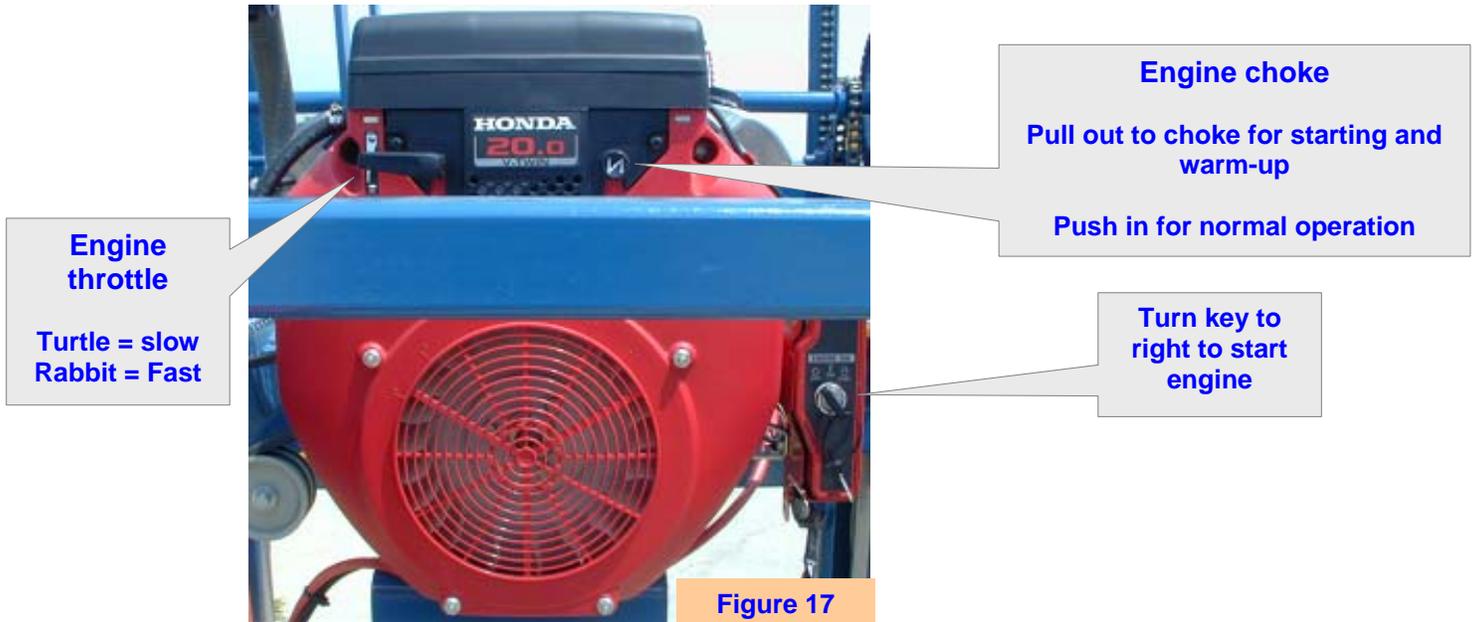

Step 4: Engage drive belt by pulling down on belt tension arm handle (**Figure 17A**). Release tension by pushing up on handle.



Step 5: Adjust blade height so you will only remove the top, barky portion of the log to create a slab.

Note: Typically you want to remove enough of a slab to open up a 4-inch face on the log. Therefore on the next cut you will produce at least a 4-inch wide flitch to be edged into a 4" wide board. This is a recommendation only. Depth and width of cut is subject to your desired finished product dimensions.

Making the Cut *(continued)*

- Step 6:** Place your left hand on the center carriage cross-member and your right hand on the push/pull handle (**Figure 18**) and move the head forward in the direction of the back of the log. Allow the carriage to move forward and the blade to begin making its cut. Listen to the engine and if it begins to “bog-down” slow your advancement into and through the log.
- Step 7:** Once you’ve completed your cut, remove the slab and raise the saw head enough to clear the log and return the head carriage to the front of the log to make your next cut.
- Step 8:** Adjust saw head height to desired board thickness, then make cut and remove flitch.
- Step 9:** Raise the saw head and return carriage to the front of the log and idle the engine.
- Step 10:** Release the log clamps and use a cant hook to turn the log 1/4 turn to the right so the flat edge is against the fence arms. Ensure the fence arms and log clamps are well below the height of the passing blade before tightening.
- Step 11:** Repeat **Step 6** through **Step 10** until you’ve cut your log into the desired lumber sizes.



Place left hand on center carriage cross-member to move carriage forward and backward

Place right hand on push/pull handle

To STOP Processing

- Step 1:** Disengage the belt drive by moving the tensioning handle upward, relieving pressure from the belt (**Figure 17A** on page 17).
- Step 2:** Reduce engine throttle to a minimum idling state, then turn the key to the off position.
- Note:** The band blade does not stop spinning automatically and will coast to a stop.
- Note:** Consider de-tensioning the blade if your machine is going to sit idle for a 24-hour period or longer.

USE OF LUMBER SCALE

Your Baker Model 18M is equipped with a lumber scale, which simplifies the lumber dimensioning process. The scale incorporates four separate scales with blade kerf factored-in for each increment. Our 1-1/4" x 0.035" Lennox blades have 0.080-inch kerf.

SCALE	RESULTING THICKNESS
4/4	1" thick boards
4/4 HWD (<i>hardwood</i>)	1-1/8" thick boards
6/4	1-1/2" thick boards
8/4	2" thick boards


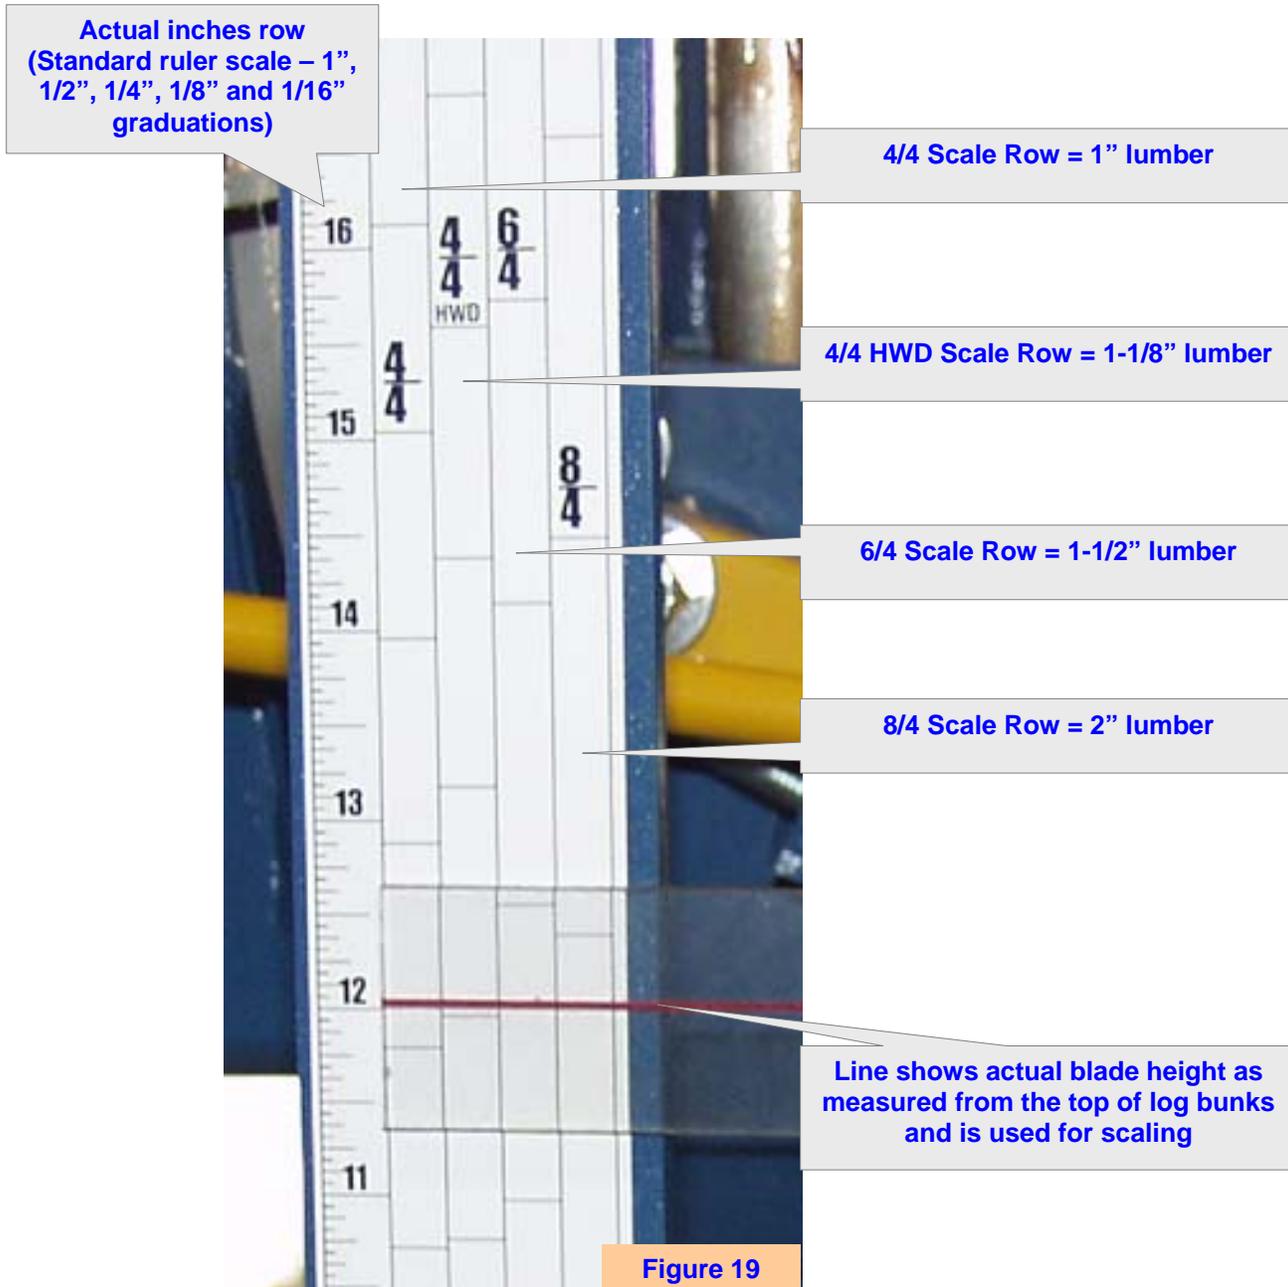



Figure 19

Calibrating Lumber Scale

- ❑ To calibrate the lumber scale actual inches row, raise the band blade approximately 12 inches above the log bunks.
- ❑ Position the band blade over one of the center log bunks and take a measurement from the top of the log bunk to the bottom tooth of the blade.

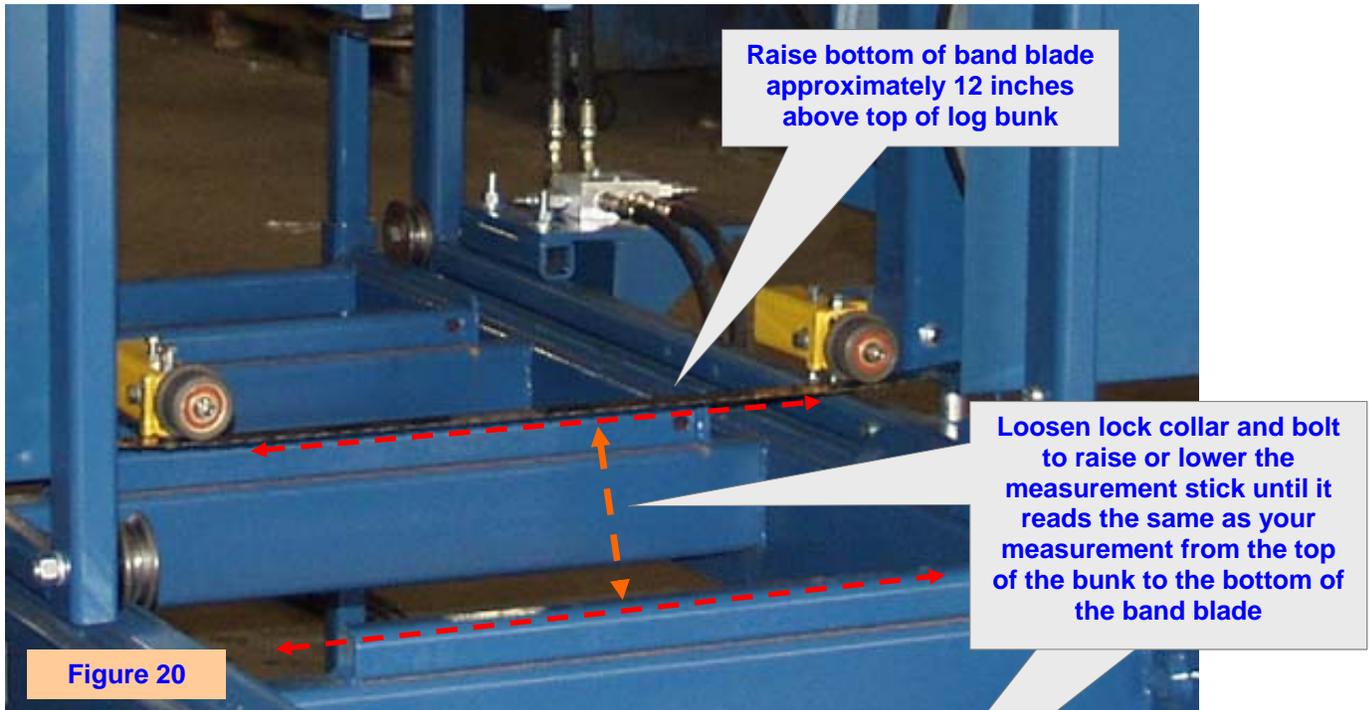

- ❑ Loosen the screw holding the collar on the measurement stick and then loosen the bolt holding the measurement stick in place.
- ❑ Raise or lower the measurement stick until the red line/mark reads the same as the measurement you took from the top of the log bunk to the bottom tooth of the band blade.
- ❑ Once the two measurements match one another, tighten the bolt holding the measurement stick in place, and then tighten the screw holding the collar around the measurement stick so that it cannot slide downward during use.
- ❑ To verify, saw a timber into a 4-sided square and measure the actual size of the timber in correlation to the actual inches on the lumber scale. For example a 12-inch x 12-inch square.

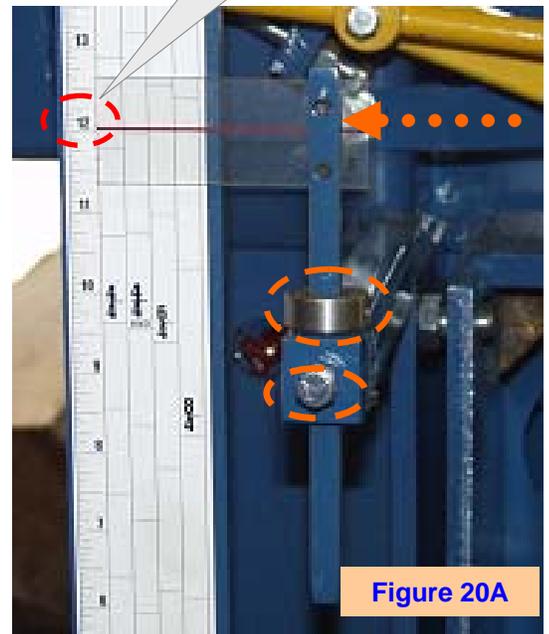

SECURING THE MILL FOR TRANSPORT

- The mill requires a 2" trailer hitch ball on the tow vehicle to properly fit the trailer coupler.
- Ensure tires are properly inflated to the correct pressure, as stated on the sidewall.
- Position carriage over the axel and secured in place by aligning the holes of the hinged frame bracket to those on the carriage head frame and inserting two (2) bolts through the aligned holes. Tighten firmly with lock washers and nuts (**Figure 21**).
- Ensure the additional section of track fits squarely on the main frame is secured in place via the front leveling legs per the illustration below (**Figure 21A**).
- Ensure all fences and clamp arms are raised and secured in place.
- Ensure trailer hitch is properly fastened with cotter pin in place on the hitch latch and the two safety chains and brake activation pull cable are securely fastened to the tow vehicle.
- Rotate trailer jack to the horizontal position and secure in place with the locking pin.
- Verify that the brake lights and turn signals work properly prior to towing.

NOTE: Baker Products will not be held responsible for any injury or damage resulting from failure to follow all safety precautions associated with vehicle towing. It is the customer's responsibility to ensure that the mill meets all laws associated with towed equipment in their respective state or local. Insurance coverage is not provided by the manufacturer, but should be covered by the tow vehicle being used for transport.

Ensure the additional section of track fits squarely on the main frame and is secured in place via the front leveling legs.

Figure 21A

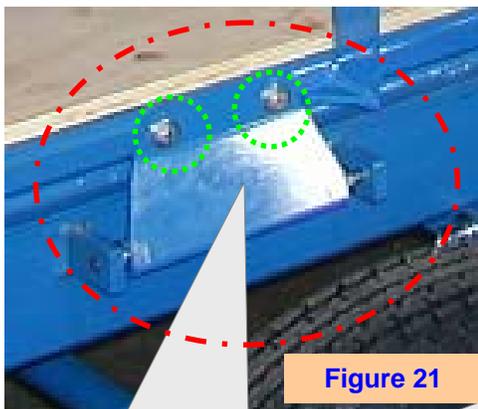


Figure 21

Hinged bracket located behind tire

Align bracket holes with carriage head frame holes and insert bolts and secure with washers and lock nuts



MAINTENANCE General Clean Up



Follow proper Lockout / Tagout procedures prior to performing any maintenance or repair on the machine.

- On a daily basis, use an air-hose to blow-off the dust and wood chips that accumulate in and around the machine. If air is not available a soft brush will work as well.
- Machine operator is closer to operating mechanism of the machine during maintenance clean up more than during production – extra care should be taken.
- During daily clean up and daily maintenance of the machinery it is advised that the operator complete a visual inspection of the equipment to look for anything that may have been damaged or become loose during normal use.
- DO NOT clean with flammable or combustible materials.
- Follow applicable codes and standards with regards to:
 - Ventilation and monitoring of work area for excessive accumulation of hazardous vapors
 - Wearing personal protective equipment for handling materials
 - Using proper procedure for disposing of all waste materials

Inspection and Preventative Maintenance



Follow proper Lockout / Tagout procedures prior to performing any maintenance or repair on the machine.

Note: For the Honda 20-hp engine this requires the key to be removed from the ignition and a “do not operate” tag attached to the engine.

Frequency	Recommendation
Daily	<input type="checkbox"/> Use an air-hose or soft brush to remove wood chips that accumulate in and around the machine and along the track.
Daily	<input type="checkbox"/> Check engine fuel and blade lubricant level by inspecting the fluid level on the side of the respective tanks. (Figure 24 & 24A, page 24)
Daily	<input type="checkbox"/> Clean the idler and pull wheels by using an air hose, brush or by wiping them down with a rag or shop towel, freeing them of dust and debris.
Daily	<input type="checkbox"/> Grease the roller guides. We recommend JT-6 grease (no more than 3 pumps). (Figure 24B & 24C, page 24)
Daily	<input type="checkbox"/> Clean & inspect the roller guides. Damaged or excessively worn roller guides should be replaced. (Figure 24B & 24C, page 24)
Weekly	<input type="checkbox"/> Check idler and pull wheel bearings for wear. Signs of wear include excessive heat, squeaking sound or looseness. (Figure 25 & 25A, page 25)
Weekly	<input type="checkbox"/> Grease the idler and pull wheel bearings. We recommend JT-6 grease (no more than 5 pumps). (Figure 25 & 25A, page 25)
Weekly	<input type="checkbox"/> Grease the raise / lower shaft bearings. We recommend JT-6 grease (no more than 5 pumps). (Figure 25B, page 25)
Monthly	<input type="checkbox"/> Check drive belts for wear and ensure belt tension is “taut” with no more than 1/2” deflection when engaged. (Figure 26, page 26)

**** RETURN ALL GUARDS AND COVERS PRIOR TO RESUMING OPERATION! ****

Inspection and Preventative Maintenance *(continued)*

Daily

- ❑ Check engine fuel and blade lubricant level by inspecting the fluid level on the side of the respective tanks.



Engine
gas tank


Keep a
minimum
of 1/2 full



Figure 24A


Figure 24

- ❑ Grease the roller guides. We recommend **JT-6** grease (*no more than 3 pumps daily*).

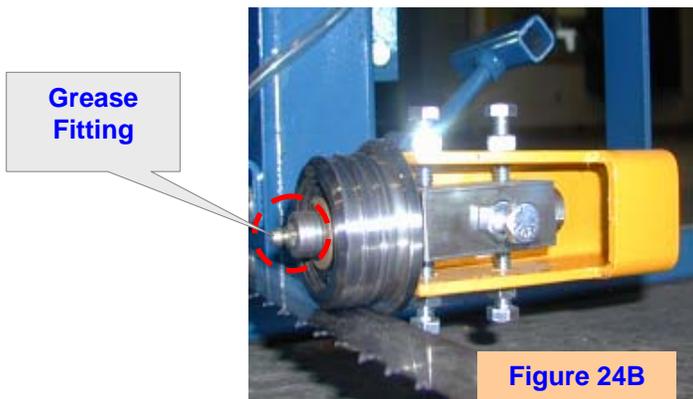

Grease
Fitting

Figure 24B

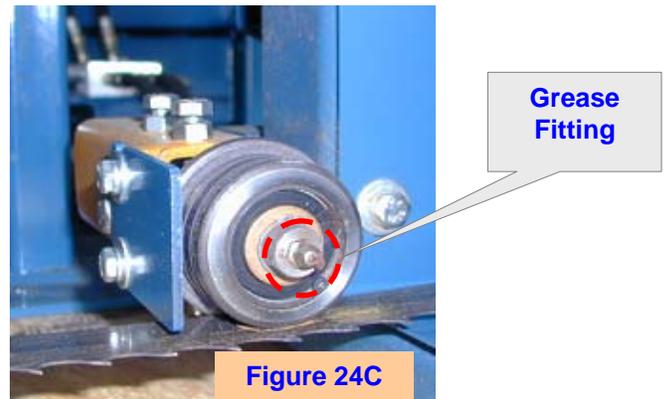

Grease
Fitting


Figure 24C

- ❑ Clean & inspect the roller guides. Damaged or excessively worn roller guides should be replaced.

Inspection and Preventative Maintenance *(continued)*


Weekly

- ❑ Check idler and pull wheel bearings for wear. Signs of wear include excessive heat, squeaking sound or looseness.
- ❑ Grease the idler and pull wheel bearings. We recommend **JT-6** grease (*no more than 5 pumps*).

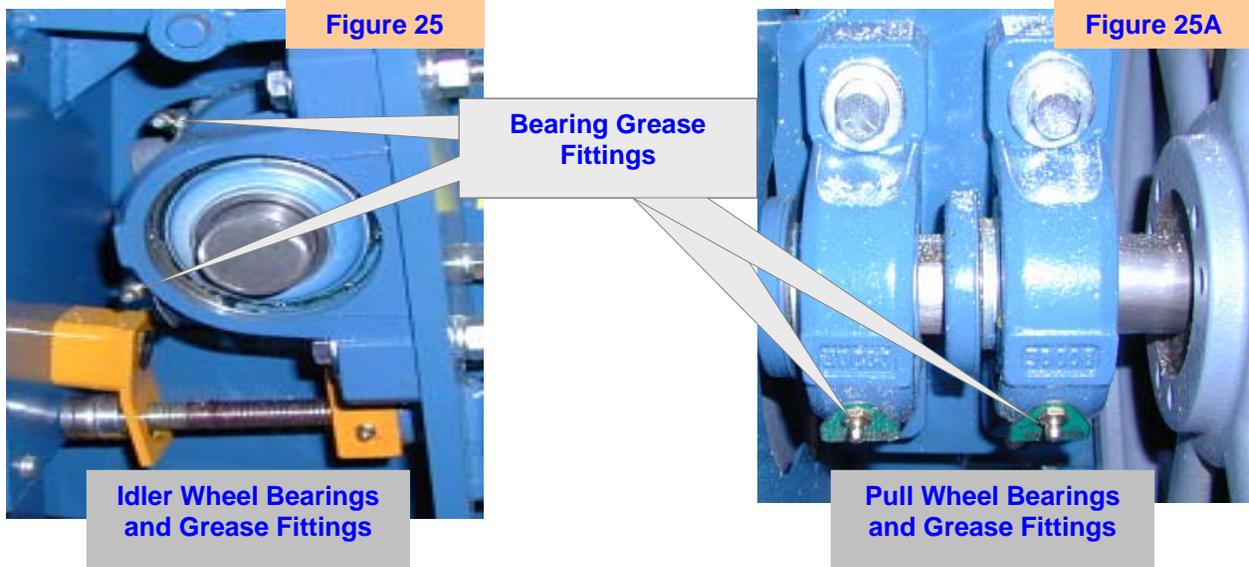

Weekly


- ❑ Grease the raise / lower shaft bearings. We recommend **JT-6** grease (*no more than 5 pumps*).

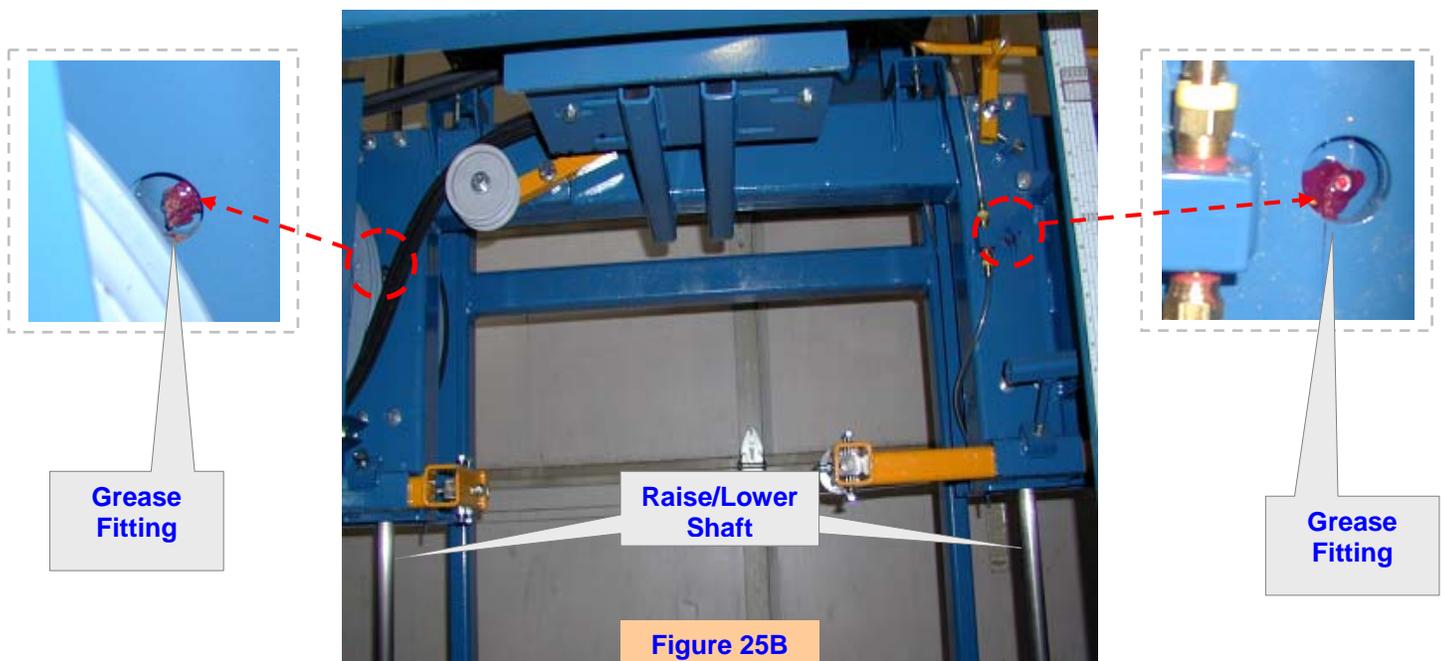

Inspection and Preventative Maintenance *(continued)*

Monthly

- ❑ Check drive belts for wear and ensure belt tension is “taut” with no more than 1/2” deflection when engaged.

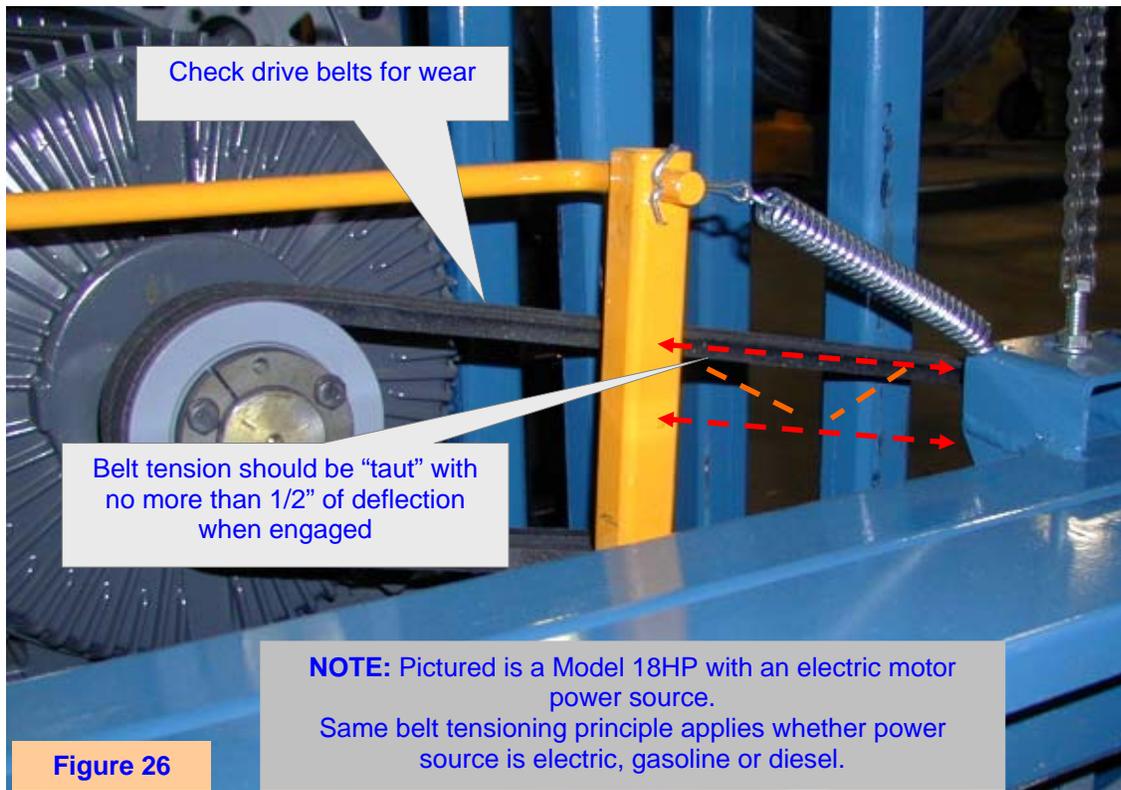

NOTE: If belts are slipping during start-up that may be a sign of loose belts.

SAFETY REMINDER


**** RETURN ALL GUARDS AND COVERS PRIOR TO RESUMING OPERATION! ****

GUIDES

Setting and Adjusting the Roller Guides

When properly set and utilized, your band blade guides will provide better blade control and longer blade life.

- To adjust or re-align the left/moveable roller guide, loosen the t-handle holding the guide arm in place. *(If adjusting the stationary right side guide, proceed to the next step).*
- Loosen the bolts (A) holding the roller guide in its vertical and horizontal position. These bolts serve as a roller guide tilting and/or leveling function.
- Loosen the bolts (B) that hold the roller guide back raised edge against the back of the blade.
- Set the roller guides by ensuring the back raised edge of the guide is spaced **1/8-inch** behind the back of the blade. Re-tighten the bolts (B) after adjustment and alignment is complete.
- The roller guide should rest evenly on the blade with no down force pressure applied initially. If a tilt adjustment is required and you haven't already done so, loosen the top and bottom tilting bolts (A) and adjust accordingly until you are satisfied the roller guides are level and even with the horizontal blade surface, then re-tighten the jamb nuts.
- Adjust the left/moveable guide to the required cutting width for your material and tighten the t-handle. Doing so will now result in a small amount of down pressure on the blade.
- Down pressure also occurs when the opposite side guide post bolt is tightened.
- Ensure any remaining bolts, nuts and jam nuts associated with the left and right roller guide assemblies, including the guide arms are tight prior to resuming operations.

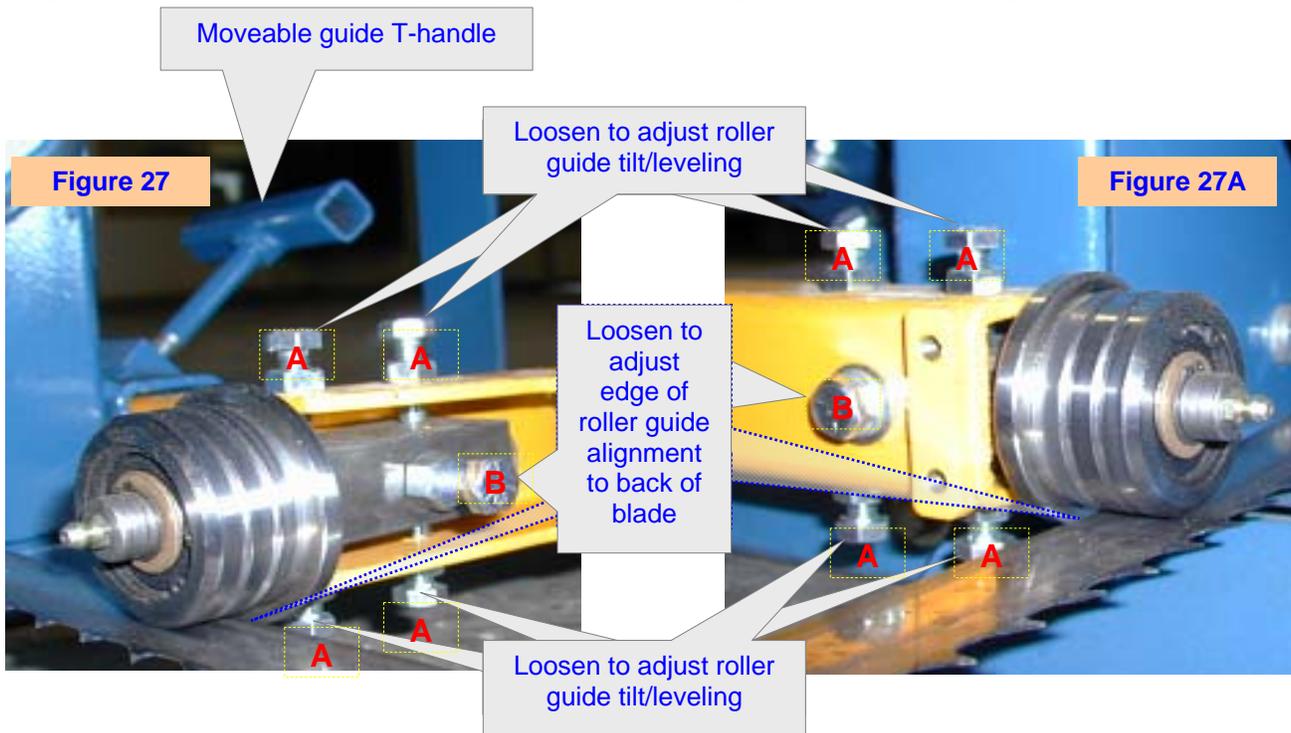

Left side – moveable guide assembly

Right side – stationary guide assembly

PARTS AND SERVICE

Part Picture	Description	Part Picture	Description
111135 	B-56 BELT	111112 	B-90 BELT
133406 	40A45 x 3/4" SPROCKET	133408 	40B9 x 5/8" SPROCKET
133409 	40B10 x 3/4" SPROCKET	131025 	40B12F x 1" SPROCKET
131042 	50BB13H x 1/2" IDLER SPROCKET	133410 	40A15 x 5/8" SPROCKET
101380 	1 - 7/16" 2 BOLT FLANGE BEARING	101384 	603 - 1/4V THRUST BEARING
101120 	1" PILLOW BLOCK BEARING	101014 	1" 2 BOLT FLANGE 17/32" BOLT HOLE BEARING
121185 	#50 CHAIN ROLLER	121007 	#50 CHAIN CONNECTOR LINK
121003 	#40 CHAIN ROLLER	121004 	#40 CHAIN CONNECTOR LINK
664903 	CARRIAGE V WHEEL	141449 	RIGHT or LEFT ROLLER GUIDE ASSEMBLY
271190 	OSD-362D x 1" TORQUE LIMITER		13'-5" x 1-1/4" LENNOX BAND BLADES



Service Contact Information

In the event that you have any problems, call us at (573) 663-7711 any time between 8:00 AM and 5:00 PM (CST), Monday through Friday.

Serial Number Location

The model and serial number are located on the top left corner of the machine.

Please refer to your serial number and model number when speaking to a service technician or ordering replacement parts.